SPA

THE FUTURE LIGHTING

Magnetic Master Series



About Us

GLS-SPA has been a leading player in the lighting industry since 1998. Starting as a lighting product trader in India, we have since expanded to import quality products from around the world. Today, we take pride in our state-of-the-art manufacturing facility in India, equipped with 16 in-house machines for production, testing and quality control, including channel bending, CNC, Die casting, powder coating, laser cutting, photogoniometer, and IP testing machines.

Our commitment to innovation and excellence is reflected in our tagline, "The Future Lighting". We believe that our lighting products can transform any space with their simple and user-friendly luminance, enabling users to feel the luminance at a heartbeat. Our magnetic and indoor ranges are the result of our research and development efforts, which have resulted in fully automated solutions designed to meet the needs of architects and interior designers.

We design and manufacture our own unique lighting products in-house with a team of 150 skilled professionals. Our focus on quality and functionality ensures that our products meet the highest standards.

Assembly Units








SPA

THE FUTURE LIGHTING



10MM


MAGNETIC

PIEZO

SERIES

GS-PMT-1506






Material	:	Aluminum Extruded
Width x Height	:	15mm x 06mm
Length	:	1000mm

Power Adapter



GS-PMT-1412






Material	:	Aluminum Extruded
Width x Height	:	14mm x 12mm
Length	:	1000mm

Power Adapter



GS-PMT-1413





Material	:	Aluminum Extruded
Width x Height	:	14mm x 13mm
Length	:	1000mm


Power Adapter



LED Driver

GS-PMT-2213





Material	:	Aluminum Extruded
Width x Height	:	22mm x 13mm
Length	:	1000mm


Power Adapter



LED Driver

GS-PB-2W





10° 30° 45°

Wattage	:	2W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W



Suitable for


LED Make

BRIDGELUX OSRAM

3000K 4000K 5700K

GS-PA-2W



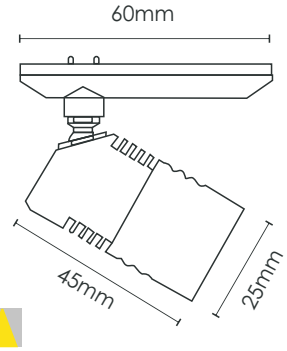

10° 30° 45°

Wattage	:	2W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W



Suitable for


LED Make

BRIDGELUX OSRAM

3000K 4000K 5700K

GS-PZ-2W



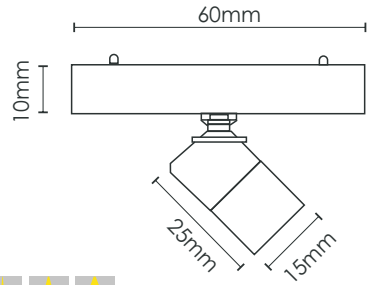

10° 30° 45°

Wattage	:	2W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W



Suitable for


LED Make


BRIDGELUX OSRAM

3000K 4000K 5700K

GS-PD-2W



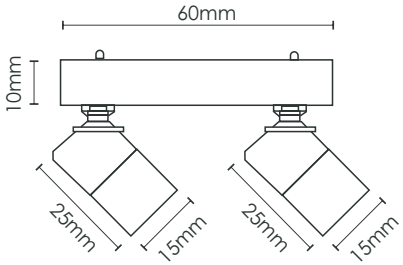



Wattage	:	2W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W



Suitable for


LED Make


BRIDGELUX OSRAM

3000K 4000K 5700K

GS-PT-2W



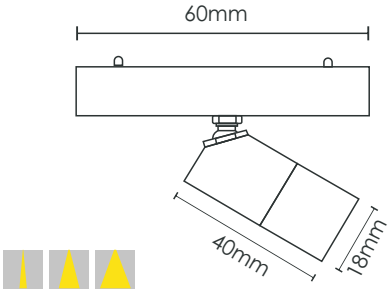



Wattage	:	2W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W



Suitable for


LED Make


BRIDGELUX OSRAM

3000K 4000K 5700K



GS-PW-3W

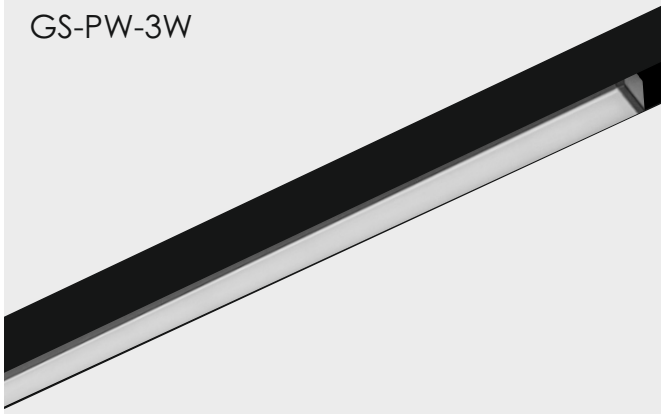

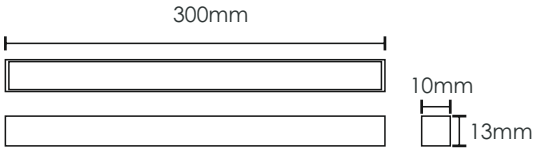



Suitable for



120°


Wattage	:	3W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W


LED Make

BRIDGELUX OSRAM

3000K 4000K 5700K

GS-PL-3W

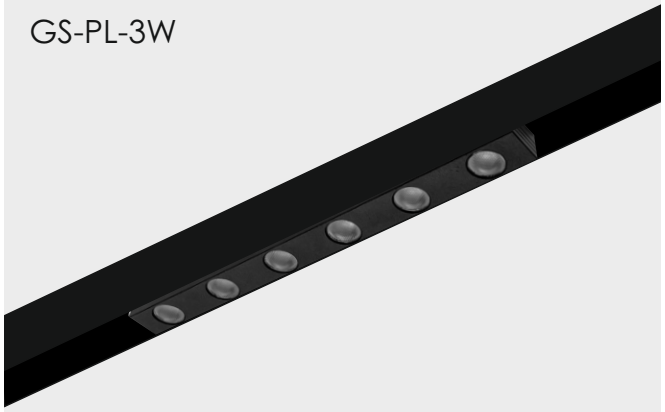

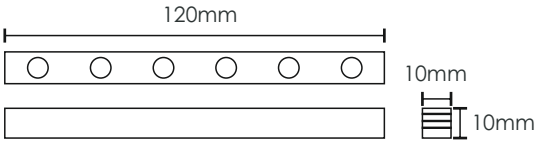



Suitable for



36°

Wattage	:	3W
Input Voltage	:	DC12V
CRI	:	90
System Efficacy	:	100lm/W

LED Make

BRIDGELUX OSRAM

3000K 4000K 5700K








6MM Magnetech


GLS-SPA
www.svldpl.net
Save Light....Save Life


IP20 CE ROHS

GS-10118

Specification:- 1M, 2M, 3M
Voltage:- 48V
Color:- Black / White

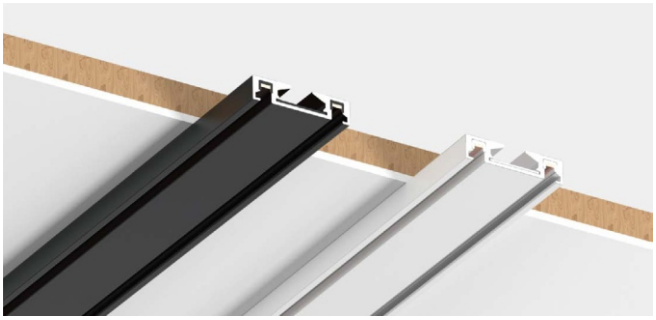




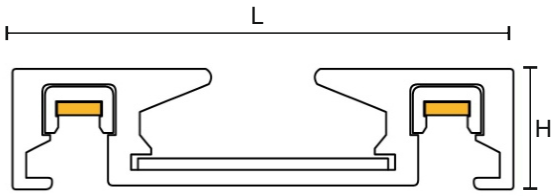



Size

Code	L	H
GS-10118	26mm	6mm

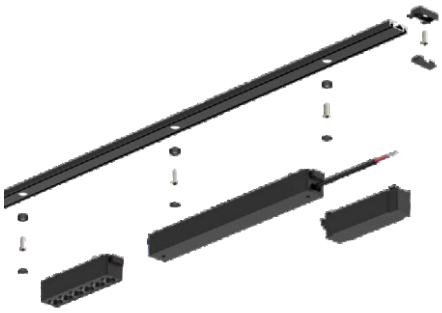



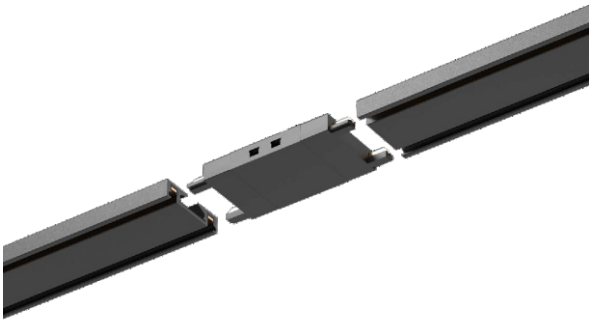

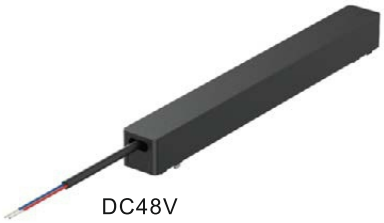

DC48V

10120
100W-Transformer
200W-Transformer



10121
Cable Bos






10122
"L" vertical
corner joint




10123
"I" horizontal
corner joint



10124
"L" horizontal
corner joint



10125
"T" horizontal
corner joint



10126
"+" horizontal
corner joint

GLS-SPA
www.svldpl.net
Save Light....Save Life

IP20 CE ROHS

GS-10047/48/49




Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 6W / 12W / 18W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:- 
24°




Size

Code	L	W	H
GS-10047	122mm	26mm	24mm
GS-10048	230mm	26mm	24mm
GS-10049	338mm	26mm	24mm

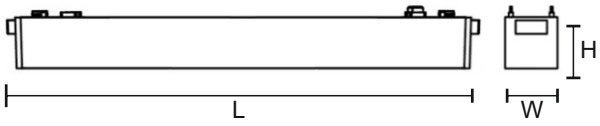


GS-10050/51/52

Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 5W/10W/20W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:- 
150°

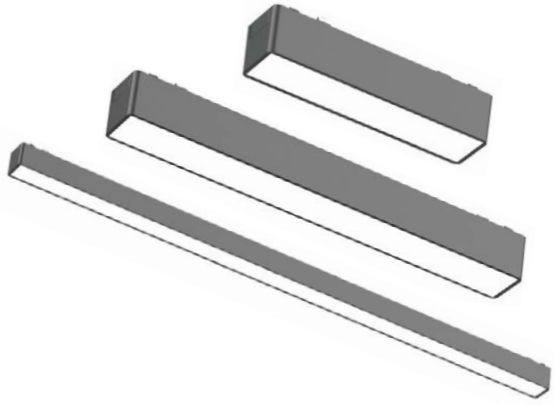

Size


Code	L	W	H
GS-10050	122mm	26mm	24mm
GS-10051	230mm	26mm	24mm
GS-10052	615mm	26mm	24mm

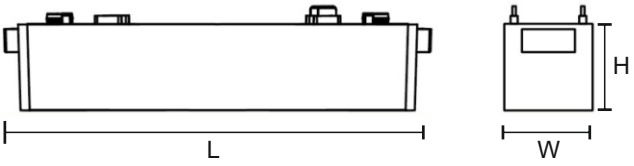

GS-10053/54

Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 6W/12W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:- 
24°








Size

Code	L	W	H
GS-10053	122mm	26mm	80mm
GS-10054	230mm	26mm	80mm

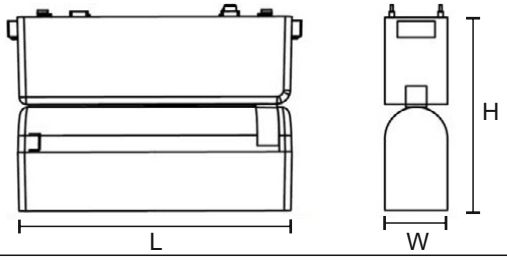

GLS-SPA
www.svldpl.net
Save Light....Save Life

IP20 CE ROHS

GS-10055/56









Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 5W/10W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:-





Size

Code	L	W	H
GS-10055	122mm	26mm	80mm
GS-10056	230mm	26mm	80mm

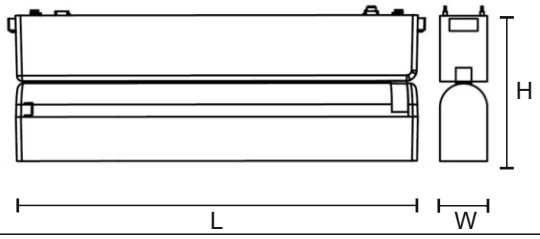

GS-10062/63






Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 6W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:-



Size

Code	D	H
GS-10062	80mm	75mm
GS-10063	80mm	75mm



GS-10066




Material:- Aluminum + Plastic
Voltage:- 48V
Wattage:- 6W
CRI:- Ra90
Color Temperature:- 3000K/4000K/5700K
Color:- Black / White
Color / Material:- Sand White / Sand Black
Beam Angle:-



Size

Code	L	W	H
GS-10066	122mm	26mm	55mm

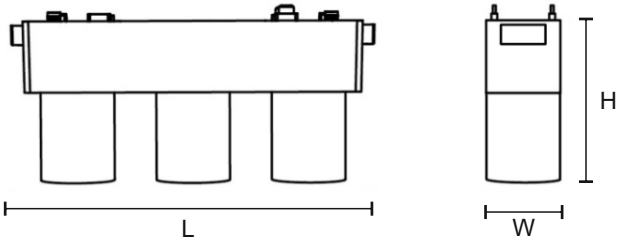

GLS-SPA
www.svldpl.net
Save Light....Save Life


IP20 CE ROHS

GS-10026

LED:- Bridgelux
Lamp:- LED
Wattage:- 6W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K
LM:- 280LM
Beam Angle:-





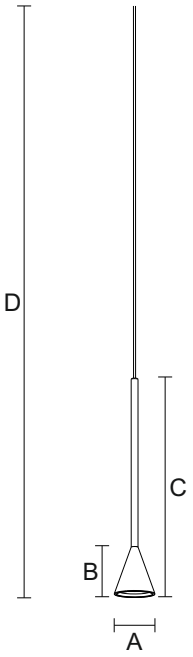



Size


Code	A	B	C	D
GS-10026	60mm	70mm	320mm	1500mm

GS-10027

LED:- Bridgelux
Lamp:- LED
Wattage:- 6W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K
LM:- 280LM
Beam Angle:-





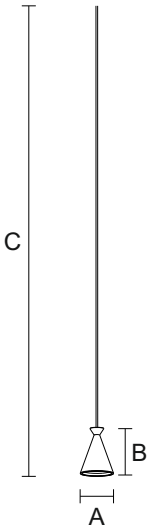





Size


Code	A	B	C
GS-10027	60mm	82mm	1500mm

GS-10012/13

LED:- Bridgelux
Wattage:- 5W/9.5W
CRI:- 80 / 90
Color Temperature:- 3000K /4000K/5700K
LM:- 200LM/ 517M
Color / Material:-

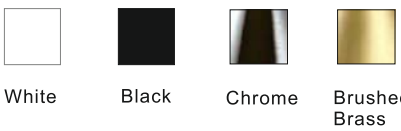

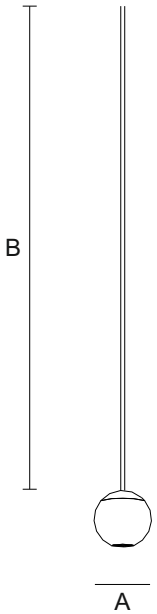

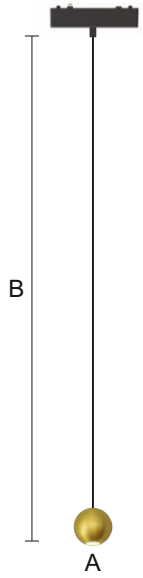

Size


Code	A	B
GS-10012	50mm	1500mm
GS-10013	70mm	1500mm


GLS-SPA
www.svldpl.net
Save Light....Save Life

IP20 CE ROHS

GS-10016

LED:- Bridgelux
Wattage:- 6W
CRI:- 80 / 90
Color Temperature:- 3000K /4000K/5700K
LM:- 260LM
Color / Material:-



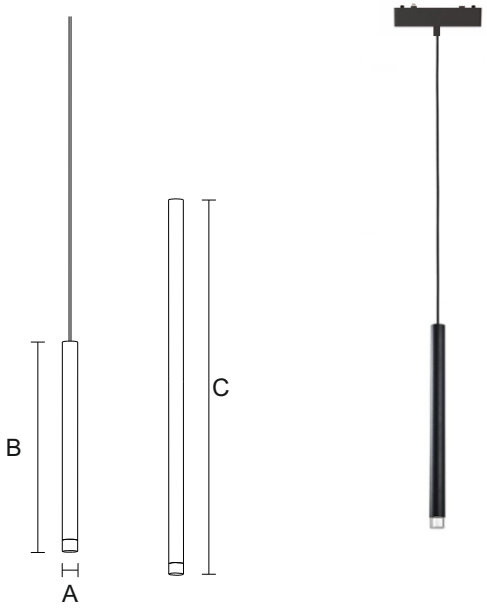


Size

Code	A	B	C
GS-10016	28mm	370mm	720mm

GS-10024

LED:- Bridgelux
Lamp:- LED
Wattage:- 6W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K



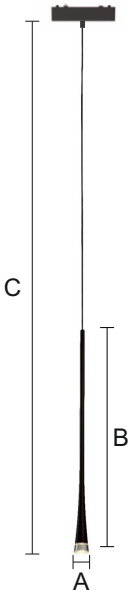


Size


Code	A	B	C
GS-10024	32mm	620mm	1500mm

GS-10070

LED:- Bridgelux
Lamp:- LED
Wattage:- 9W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K



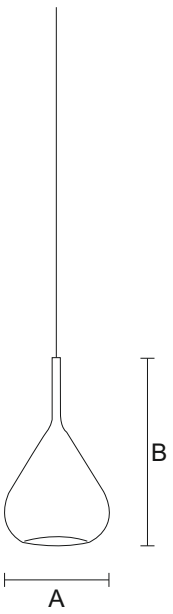



Size

Code	A	B
GS-10070	200mm	350mm


GLS-SPA
www.svldpl.net
Save Light....Save Life

IP20 CE ROHS

GS-10071



LED:- Bridgelux
Lamp:- LED
Wattage:- 9W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K

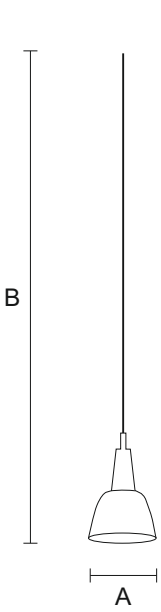




Size

Code	A	B
GS-10071	115mm	1500mm

GS-10072

LED:- Bridgelux
Lamp:- LED
Wattage:- 9W
CRI:- 90
Color Temperature:- 3000K/4000K/5700K

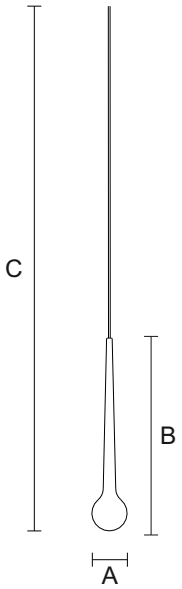



Size

Code	A	B	C
GS-10071	70mm	435mm	1500mm

6MM-PRO

SPA
THE FUTURE LIGHTING


Magnetic Track Channels

6MM PRO

SPA
THE FUTURE LIGHTING



GS-MT-6MM-PRO-17 Two Line Track



Length

1000mm / 2000mm / 3000mm



GS-MT-6MM-PRO-30 Two Line Track




Length

1000mm / 2000mm / 3000mm




GS-MT-6MM-PRO-35 Four Line Track

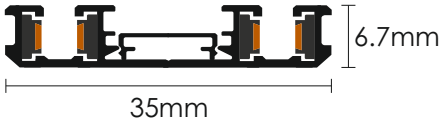


Length

1000mm / 2000mm / 3000mm

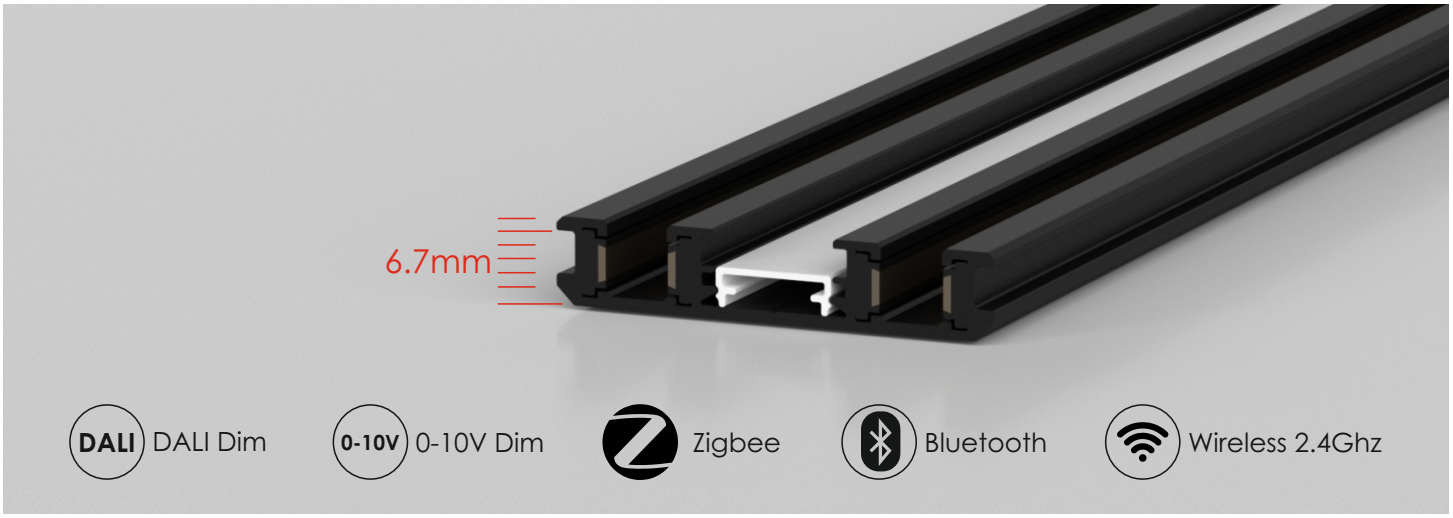

48V Power Supply



Size :- L-150mm W-30mm, H-35mm

Power -100W



Size :- L-300mm W-30mm, H-25mm


Power - 200W

Live End







Jointers



I-Jointer




L-Jointer



T-Jointer



X-Jointer



WC-Jointer

DALI DALI Dim

0-10V 0-10V Dim

Zigbee

Bluetooth

Wireless 2.4Ghz


Magnetic Track Attachments

6MM PRO

SPA
THE FUTURE LIGHTING




GS-MT-6MM-PRO-TL-30



Wattage	:- 5W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux




GS-MT-6MM-PRO-TL-50



Wattage	:- 12W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux




GS-MT-6MM-PRO-TL-62



Wattage	:- 20W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux



GS-MT-6MM-PRO-TL-75



Wattage	:- 30W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux

DALI DALI Dim 0-10V 0-10V Dim Zigbee Bluetooth Wireless 2.4Ghz


Magnetic LINEA Attachments

6MM PRO

SPA
THE FUTURE LIGHTING




GS-MT-6MM-PRO-LINEA-150




Wattage	:- 10W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux




GS-MT-6MM-PRO-LINEA-300

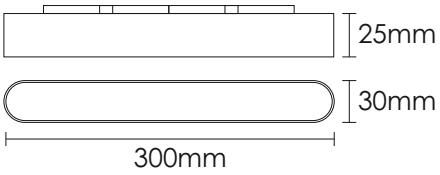


Wattage	:- 20W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux

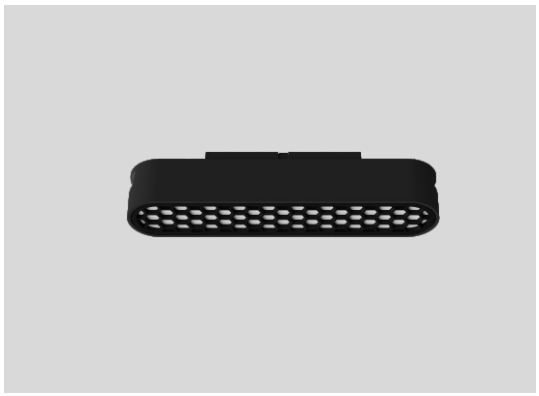


GS-MT-6MM-PRO-HC-150



Wattage	:- 10W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux

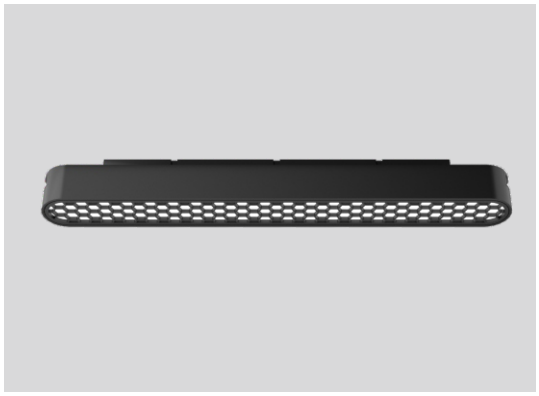

GS-MT-6MM-PRO-HC-300

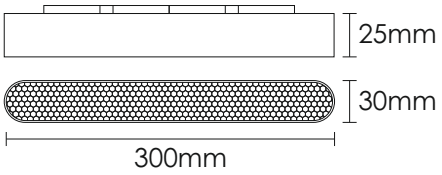

Wattage	:- 20W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux

DALI DALI Dim

0-10V 0-10V Dim

Zigbee

Bluetooth

Wireless 2.4Ghz


Magnetic LDA Attachments

6MM PRO


SPA
THE FUTURE LIGHTING




GS-MT-6MM-PRO-LDA-150



Wattage	:- 10W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux

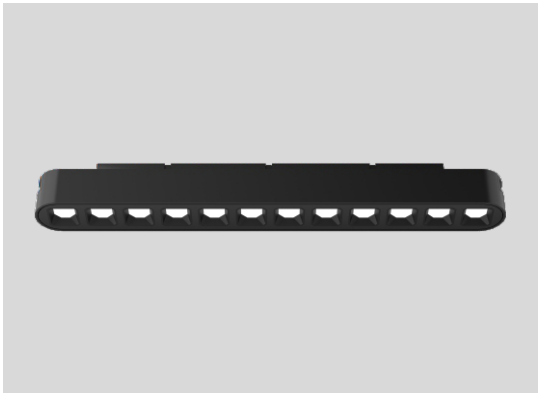

GS-MT-6MM-PRO-LDA-300

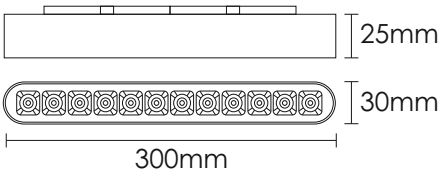

Wattage	:- 20W
Lumen	:- 100lm/W
Voltage	:- 48V
CRI	:- 90
CCT	:- 3000K/4000K/5700K
LED	:- OSRAM, Bridgelux





DALI DALI Dim


0-10V 0-10V Dim

Zigbee

Bluetooth

Wireless 2.4Ghz

LED MAGIC LINEA LIGHT

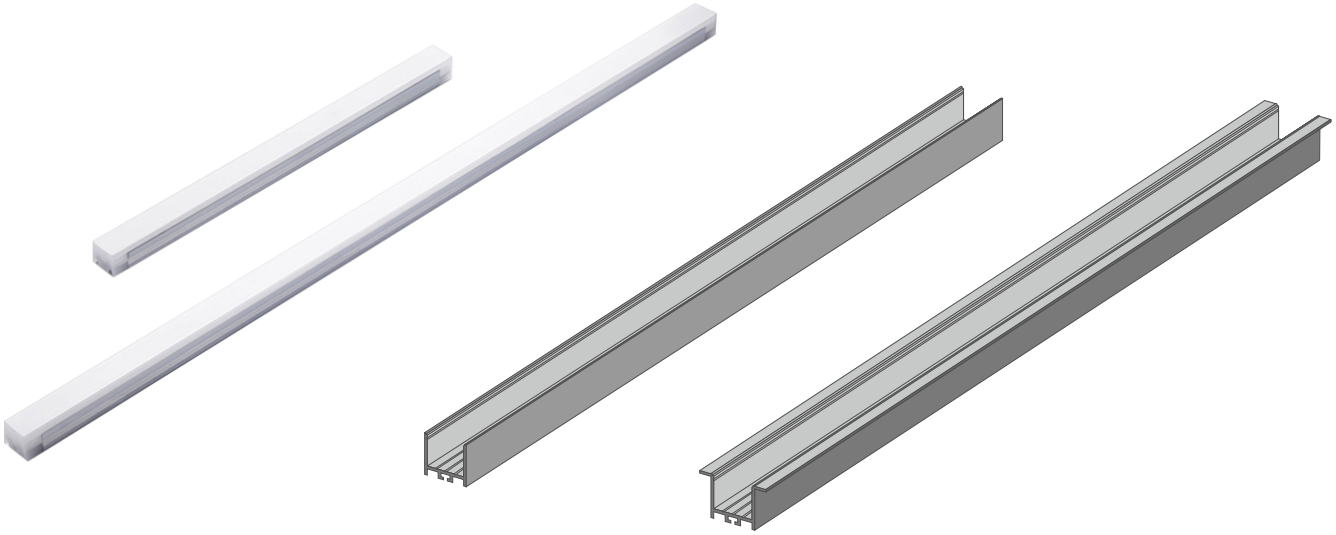

GS-LMS-3W-200
GS-LMS-5W-300
GS-LMS-9W-600

110-240V F IP20 30000H


Power Cable



Connecting Cables


Right-Angle connector



Cross Joint

SPECIFICATION

- SMD LED
- Aluminum Extrusion Housing
- Constant Current LED Driver
- Best in Class SMD LED Module For Better High Output And Efficiency
- Milky Diffuser.



Surface



Recessed

LED DETAILS


- Make :- OSRAM SEOUL


LED DRIVER DETAIL

- Make:- PHILIPS b,a,g,

APPLICATION

- Commercial
- Residential
- Retail
- Mall Management

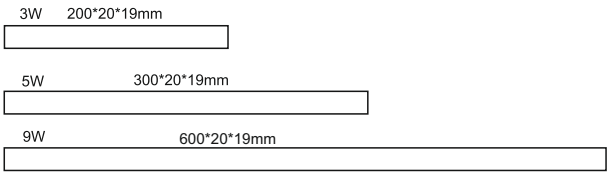




All Dimension are in mm, Tolerance ± 2mm

Model No	LED	Body Material	Lumens	Size	CRI	Wattage
GS-LMS-3W-200	2835	PC+Aluminum	220+10%	200*20*19mm	80	3W
GS-LMS-5W-300	2835	PC+Aluminum	380+10%	300*20*19mm	80	5W
GS-LMS-9W-600	2835	PC+Aluminum	380+10%	600*20*19mm	80	9W
Right-Angle-connector	2835	PC	40+10%	30*30*19mm	80	0.6W
Cross Joint	2835	PC	90+10%	40*40*19mm	80	1.2W
Power Cable	----	----	----	Length:150mm	----	----
Connecting Cables	----	----	----	Length:150mm	----	----
Connecting Cables	----	----	----	Length:220mm	----	----
Connecting Cables	----	----	----	Length:330mm	----	----
Connecting Cables	----	----	----	Length:630mm	----	----
Connecting Cables	----	----	----	Length:1240mm	----	----
Connecting Cables	----	----	----	Length:1840mm	----	----


GLS-SPA
www.svidpl.net
Save Light....Save Life
MICRO MAGNET

MICRO MAGNET SERIES

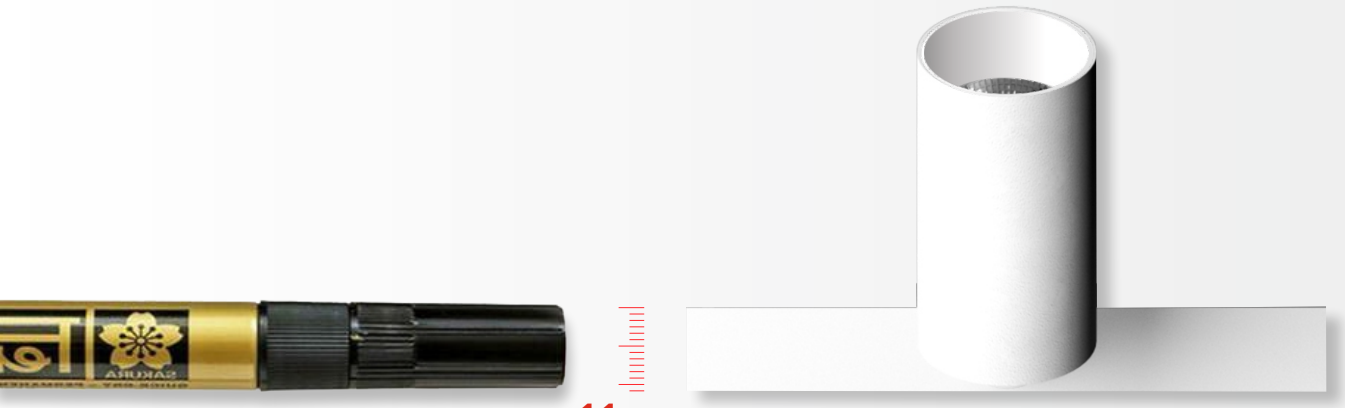


11mm



17mm

MICRO MAGNET CHANNELS


Aluminum Channels

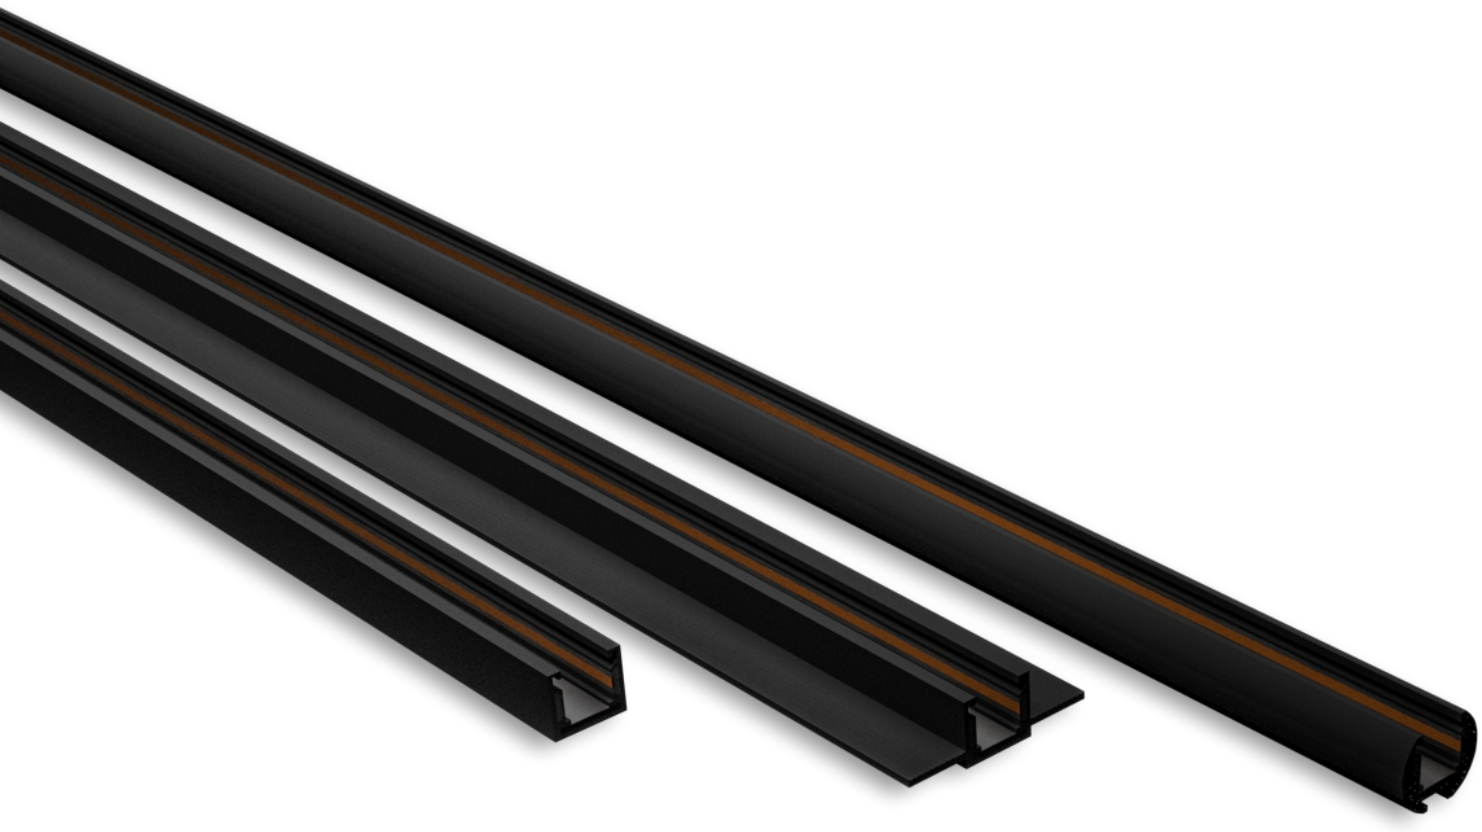


CODE

Dimension (mm)


GS-MM-1715






1000 / 1500 / 2000


GS-MM-4615






1000 / 1500 / 2000

GS-MM-2218





1000 / 1500 / 2000

SPECIFICATION

- Aluminum Extruded Prole
- High Efficient IP 67 Master Driver

LED DRIVER DETAIL

48V ,IP 67



Power Adapter



Connector




End Cap

MICRO MAGNET SPOT LIGHTS


SPOT LIGHTS






CODE	WATT	LED	MATERIAL	CCT	BEAM ANGLE
GS-MM-TL20	3W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	15° 24° 36°



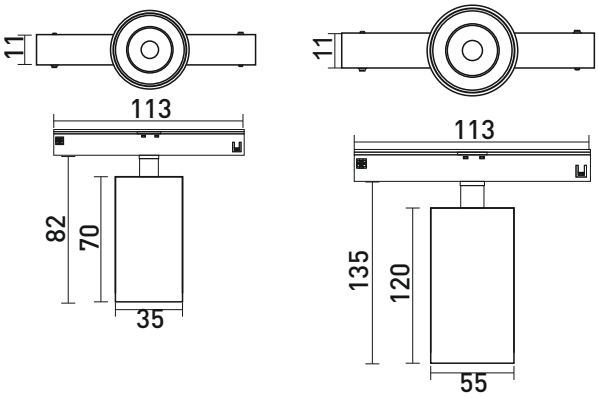

CODE	WATT	LED	MATERIAL	CCT	BEAM ANGLE
GS-MM-TL35	5W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	15° 24° 36°
GS-MM-TL55	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	15° 24° 36°



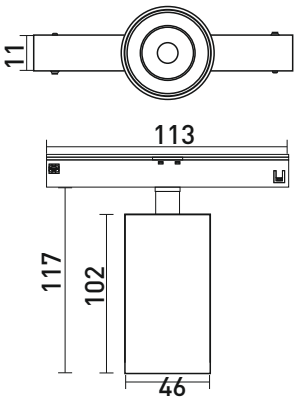



CODE	WATT	LED	MATERIAL	CCT	BEAM ANGLE
GS-MM-TL46	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	15° 24° 36°


MICRO MAGNET LINEA & LDA LIGHTS

LINEA & LDA



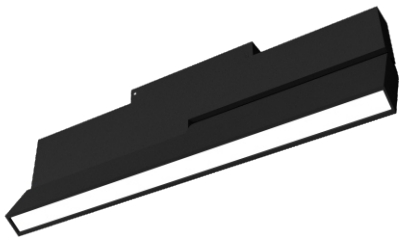


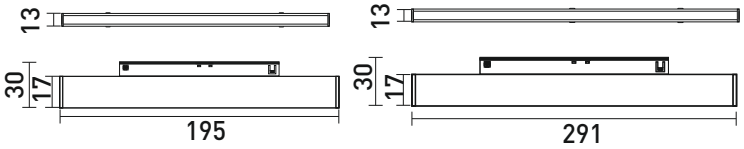


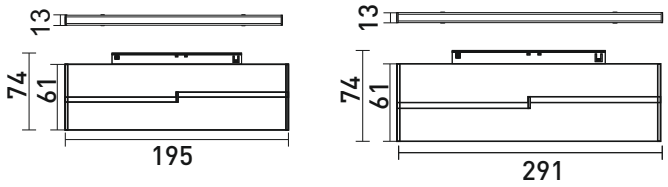


CODE	WATT	LED	MATERIAL	CCT	BEAM ANGLE
GS-MM-LINEA12	10W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	110°
GS-MM-LINEA-18	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	110°
GS-MM-MB-LINEA12	10W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	110° 90°
GS-MM-MB-LINEA18	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	110° 90°



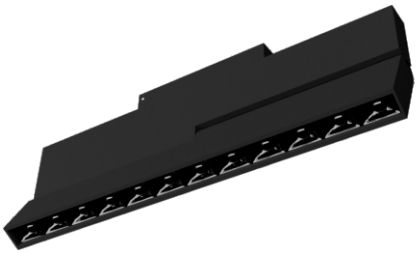

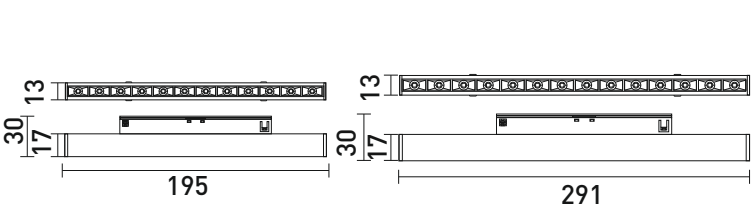

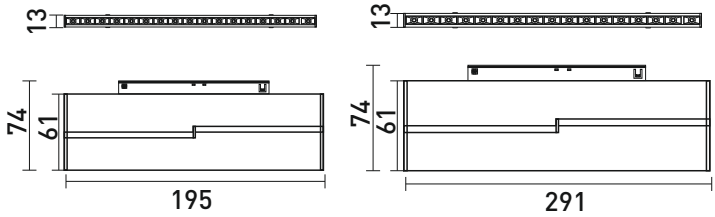

CODE	WATT	LED	MATERIAL	CCT	BEAM ANGLE
GS-MM-LDA12	10W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	24° 36°
GS-MM-LDA18	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	24° 36°
GS-MM-MB-LDA12	10W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	24° 36° 90°
GS-MM-MB-LDA18	15W	BRIDGELUX	Die-Cast Aluminum	3000K / 4000K / 5700K	24° 36° 90°


Cartier















Magnetic Channels

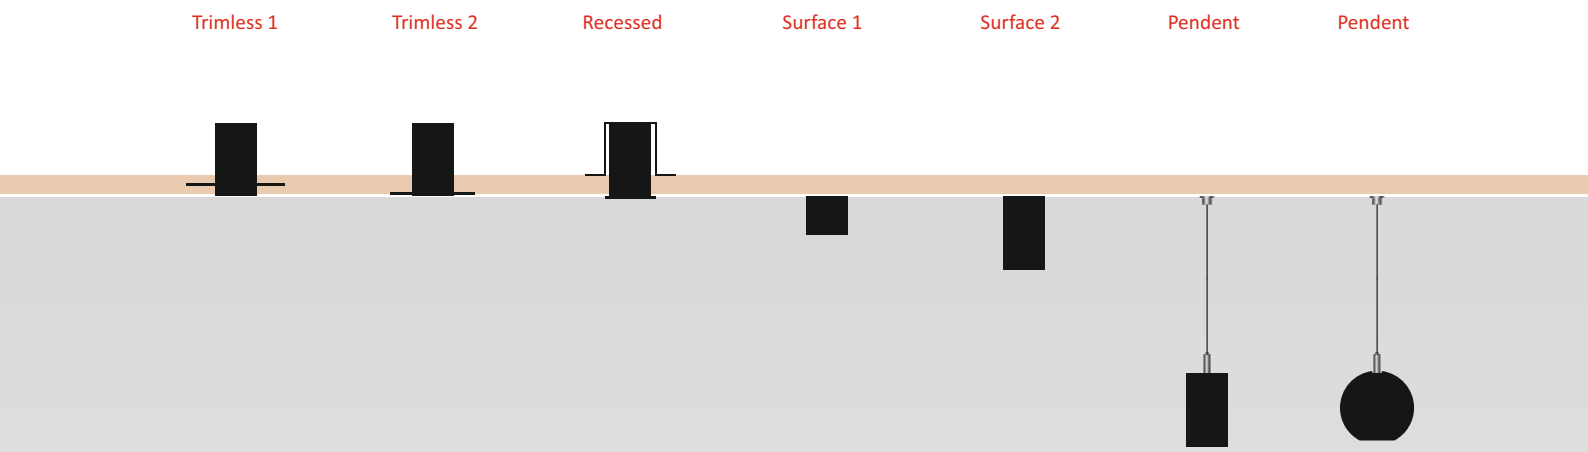


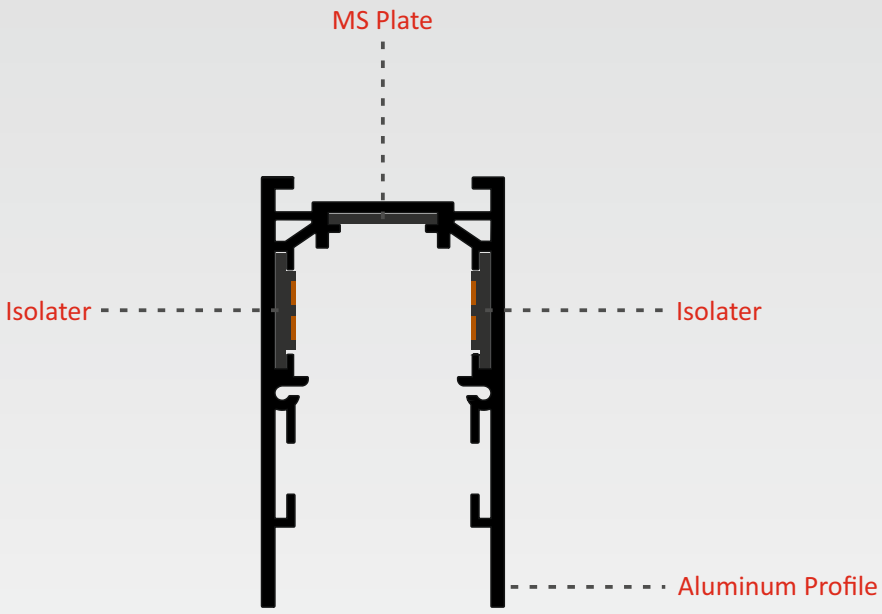


Magnetic Channel 20mm / 26mm / 36mm





GS-MT-20-SUS-2351

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-26-RD-54

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-20-TL-6051

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-36-S-3632

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-26-S-2622

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-36-SUS-3665

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-26-SUS-2653

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-36-C-4665

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-26-C-4053

Dimension (mm)	Length (mm)
	1000
	1500
	2000




GS-MT-36-TL-7565

Dimension (mm)	Length (mm)
	1000
	1500
	2000



GS-MT-26-TL-7053

Dimension (mm)	Length (mm)
	1000
	1500
	2000

Colors

White	Rose Gold	Gold	Copper	Chrome	Brass	Titanium Black	Black

Magnetic Accessories 20mm / 26mm / 36mm



20mm Power Adapter



20mm I-Jointer



20mm Connector



20mm Suspension Kit



End Cap



26mm Power Adapter



26mm I-Jointer



26mm L-Jointer



26mm Suspension Kit



C-Clamp



36mm Power Adapter



36mm I-Jointer



36mm Connector



36mm Suspension Kit



RF based Remote

LED DRIVER


High Efficient IP 67 Master Driver

24V / 48V, IP67

24V, IP 67
(For non-dimming only)

Magnetic Jointers

L-WC-JOINTER (Surface)




Dimension (mm)	
155 x 155	26mm / 36mm

L-WW-JOINTER (Surface)




Dimension (mm)	
157 x 157	26mm / 36mm

T-JOINTER (Surface)




Dimension (mm)	
310 x 157	26mm / 36mm

X-JOINTER (Surface)




Dimension (mm)	
310 x 310	26mm / 36mm

L-WC-JOINTER (Surface / Pendent)




Dimension (mm)	
155 x 155	20mm / 26mm 36mm

L-WW-JOINTER (Surface / Pendent)




Dimension (mm)	
157 x 157	20mm / 26mm 36mm

T-JOINTER (Surface / Pendent)




Dimension (mm)	
310 x 157	20mm / 26mm 36mm

X-JOINTER (Surface / Pendent)




Dimension (mm)	
310 x 310	20mm / 26mm 36mm

L-WC-JOINTER (Recessed)




Dimension (mm)	
155 x 155	26mm / 36mm

L-WW-JOINTER (Recessed)




Dimension (mm)	
157 x 157	26mm / 36mm

T-JOINTER (Recessed)




Dimension (mm)	
310 x 157	26mm / 36mm

X-JOINTER (Recessed)




Dimension (mm)	
310 x 310	26mm / 36mm

L-WC-JOINTER (Trimless)




Dimension (mm)	
155 x 155	20mm / 26mm 36mm

L-WW-JOINTER (Trimless)




Dimension (mm)	
157 x 157	20mm / 26mm 36mm

T-JOINTER (Trimless)



Dimension (mm)	
310 x 157	20mm / 26mm 36mm

X-JOINTER (Trimless)




Dimension (mm)	
310 x 310	20mm / 26mm 36mm

L-WC-JOINTER (Round)



Dimension (mm)	
155 x 155	54mm

L-WW-JOINTER (Round)




Dimension (mm)	
157 x 157	54mm

T-JOINTER (Round)



Dimension (mm)	
310 x 157	54mm


X-JOINTER (Round)



Dimension (mm)	
310 x 310	54mm


Magnetic Track Attachments 20mm / 26mm / 36mm






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-TL-01	A: 63 x B: 93	12W	Aluminum Extruded	24° 36°	
GS-MT-TL-02	A: 63 x B: 144	18W	Aluminum Extruded		
GS-MT-TL-03	A: 68 x B: 155	18W	Die- Cast Aluminum		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-TL-04	A: 40 x B: 180	15W	Aluminum Extruded	12° 36°	
GS-MT-TL-05	A: 40 x B: 120	2x5W	Aluminum Extruded		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-TL-06	A: 25 x B: 47	3W	Die- Cast Aluminum	20°~50° Lens	
GS-MT-TL-06	A: 35 x B: 74	8W	Die- Cast Aluminum		
GS-MT-TL-06	A: 50 x B: 99	10W	Die- Cast Aluminum		


Adjustable beam

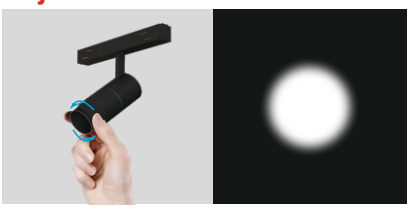

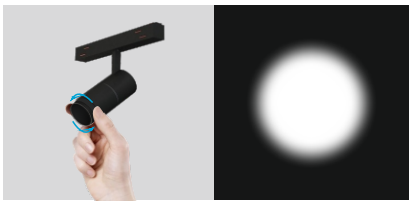








Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-TL-07	A: 35 x B: 80	7W	Aluminum Extruded	24°	
GS-MT-TL-07	A: 45 x B: 100	12W	Aluminum Extruded		
GS-MT-TL-07	A: 55 x B: 120	20W	Aluminum Extruded		

LED Make	CCT
BRIDGELUX OSRAM	3000K 4000K 5700K

24V 48V IP20 30000H DALI DALI 2 TW DALI 1-10V Dimming 2.4GHz RF


Magnetic LDA Attachments 20mm / 26mm / 36mm






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-20MT-LDA	A: 15 x B: 118	6W	Die- Cast Aluminum	24°	
GS-20MT-LDA	A: 15 x B: 232	12W	Die- Cast Aluminum		
GS-20MT-LDA	A: 15 x B: 460	24W	Die- Cast Aluminum		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-20MT-MB-LDA	A: 15 x B: 118	6W	Die- Cast Aluminum	24°	
GS-20MT-MB-LDA	A: 15 x B: 232	12W	Die- Cast Aluminum		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-26MT-LDA	A: 22 x B: 100	5W / 10W	Aluminum Extruded	15° 30° 45°	






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-26MT-MB-LDA	A: 25 x B: 115	5W / 10W	Die- Cast Aluminum	15° 30° 45°	





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-36MT-LDA	A: 32 x B: 138	5W / 10W	Aluminum Extruded	15° 30° 45°	





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-36MT-MB-LDA	A: 35 x B: 138	5W / 10W	Die- Cast Aluminum	15° 30° 45°	

LED Make

BRIDGELUX OSRAM


CCT

3000K 4000K 5700K


24V 48V IP20 30000H DALI DALI 2 TW DALI 1-10V Dimming TW 2.4GHz RF


Magnetic Linea Attachments 20mm / 26mm / 36mm






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-20MT-LINEA	A: 15 x B: 300	10W	Aluminum Extruded	120°	
GS-20MT-LINEA	A: 15 x B: 600	20W	Aluminum Extruded		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-20MT-MB-LINEA	A: 15 x B: 118	6W	Die- Cast Aluminum	120°	
GS-20MT-MB-LINEA	A: 15 x B: 232	12W	Die- Cast Aluminum		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-26MT-LINEA	A: 22 x B: 360	6W	Aluminum Extruded	120°	
GS-26MT-LINEA	A: 22 x B: 600	12W	Aluminum Extruded		
GS-26MT-LINEA	A: 22 x B: 840	15W	Aluminum Extruded		
GS-26MT-LINEA	A: 22 x B: 1080	20W	Aluminum Extruded		
GS-26MT-LINEA	A: 22 x B: 1200	24W	Aluminum Extruded		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-36MT-LINEA	A: 32 x B: 360	6W	Aluminum Extruded	120°	
GS-36MT-LINEA	A: 32 x B: 600	12W	Aluminum Extruded		
GS-36MT-LINEA	A: 32 x B: 840	15W	Aluminum Extruded		
GS-36MT-LINEA	A: 32 x B: 1080	20W	Aluminum Extruded		
GS-36MT-LINEA	A: 32 x B: 1200	24W	Aluminum Extruded		





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-36MT-LINEA-3018	A: 22 x B: 360	6W	Aluminum Extruded	120°	
GS-36MT-LINEA-3018	A: 22 x B: 600	12W	Aluminum Extruded		
GS-36MT-LINEA-3018	A: 22 x B: 840	15W	Aluminum Extruded		
GS-36MT-LINEA-3018	A: 22 x B: 1080	20W	Aluminum Extruded		
GS-36MT-LINEA-3018	A: 22 x B: 1200	24W	Aluminum Extruded		





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-26MT-LINEA-L	A: 300 x B: 300	10W	Aluminum Extruded	120°	

LED Make

BRIDGELUX OSRAM


CCT

3000K 4000K 5700K

24V 48V IP20 30000H DALI DALI 2 TW DALI 1-10V Dimming 2.4GHz RF


Magnetic Surface & Suspended Attachments 20mm / 26mm / 36mm






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-SF-DL	A: 100 x B: 70	5W	Aluminum Extruded	40° 120°	
GS-MT-SUS-DL-01	A: 100 x B: 70	5W	Aluminum Extruded		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-SUS-DL-02	A: 30 x B: 300	12W	Aluminum Extruded	12° 24° 36°	
GS-MT-SUS-DL-02	A: 30 x B: 320	15W	Aluminum Extruded		
GS-MT-SUS-DL-02	A: 40 x B: 320	15W	Aluminum Extruded		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-MB-PL	A: 150	15W	Die- Cast Aluminum	120°	
GS-MT-MB-PL	A: 300	30W	Die- Cast Aluminum		






Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-MB-DL	A: 40 x B: 180	15W	Die- Cast Aluminum	40°	





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-ROUNDO	A: 63 x B: 93	5W	Diffused Acrylic Pipe	360°	
GS-MT-ROUNDO	A: 63 x B: 144	10W	Diffused Acrylic Pipe		





Product Code	Dimension (mm)	Wattage	Material	Beam Angle	LED Type
GS-MT-SUS-BALL	A: 94 x B: 100	15W	Diffused Acrylic Ball	12° 60°	
GS-MT-SUS-BAY	A: 170 x B: 210	12W	Aluminum Dome		

LED Make


BRIDGELUX OSRAM

CCT

3000K 4000K 5700K


24V 48V IP20 30000H DALI DALI 2 TW DALI 1-10V Dimming TW 2.4GHz RF

Dali Controller 26mm/28mm/36mm/50mm

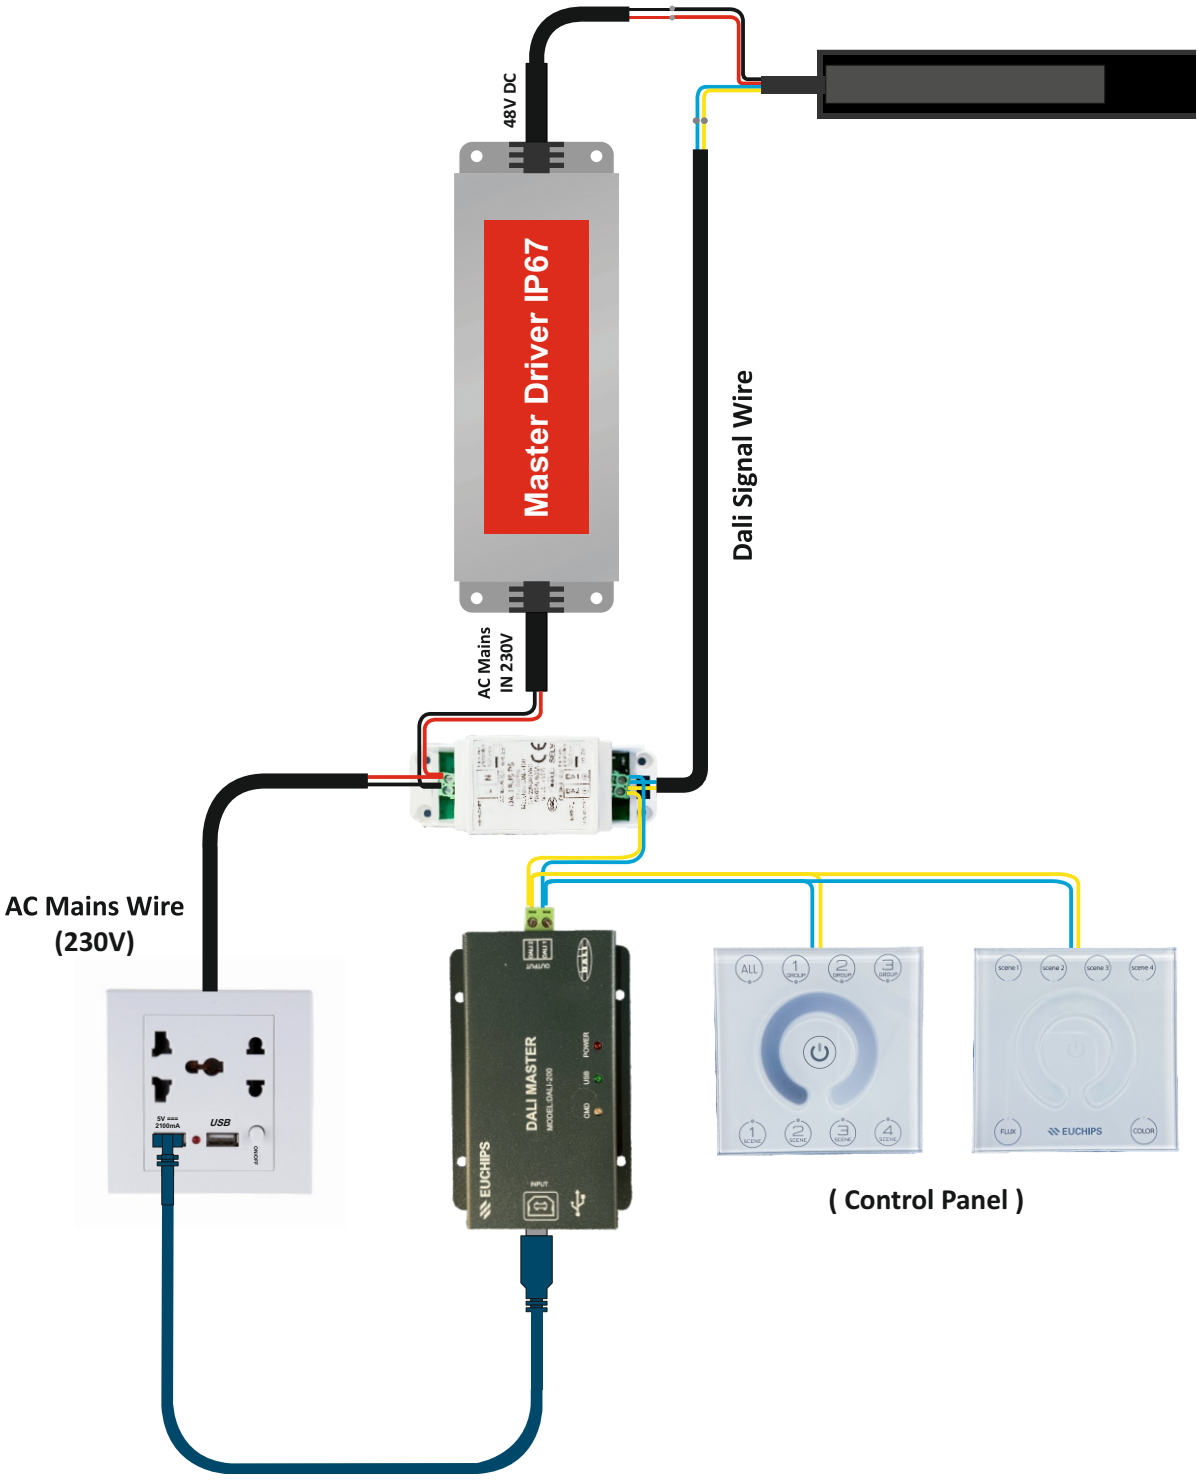




For Non Dimming 26mm / 28mm / 36mm / 50mm

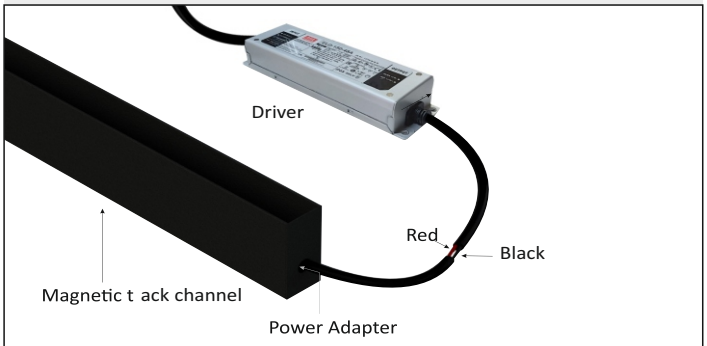


Connect the DC Output of Driver to Magnetic Channel s Power Adapter to Light On (shown below)

For Analog Dimming 26mm / 28mm / 36mm / 50mm

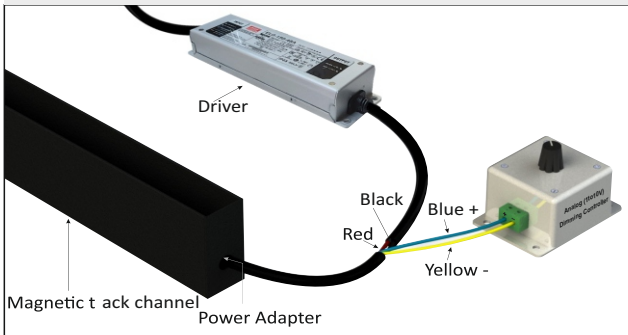


Connect the DC Output of Driver to Magnetic Channel s Power Adapter to Light On and for Analog Dimming Connect the Blue & Yellow Wire to respecti e point of controller (shown below)

For Dali / Tunable Dimming 26mm / 28mm / 36mm / 50mm

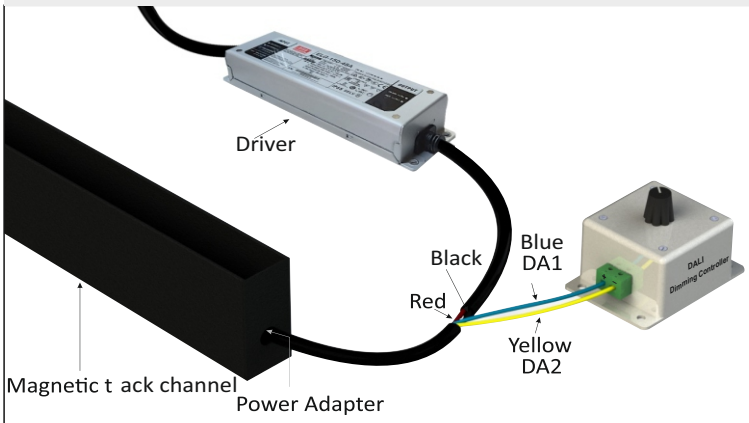


Connect the DC Output of Driver to Magnetic Channel s Power Adapter to Light On and for DALI Dimming Connect the Blue & Yellow Wire to respecti e point of controller (shown below)

1

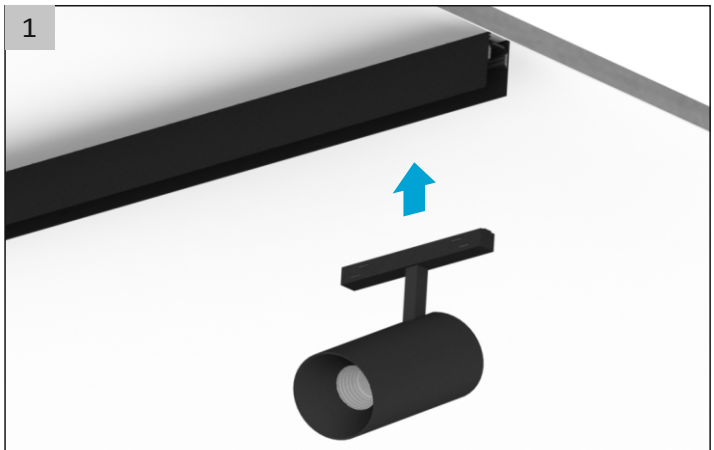

Snap in the product by hand carefully inside the track channel.

2

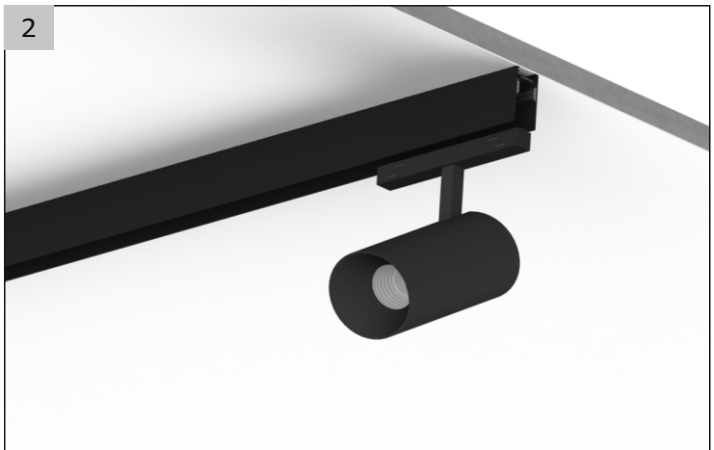


3




Product is in light up condition.

4

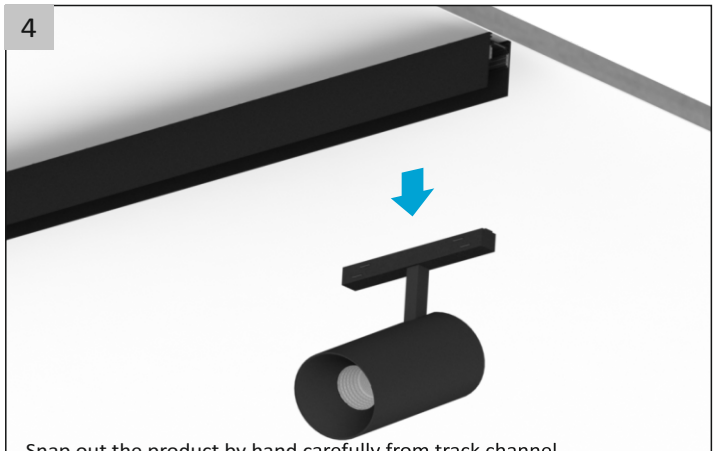


Snap out the product by hand carefully from track channel as per required .

Round Corner Track Upcoming

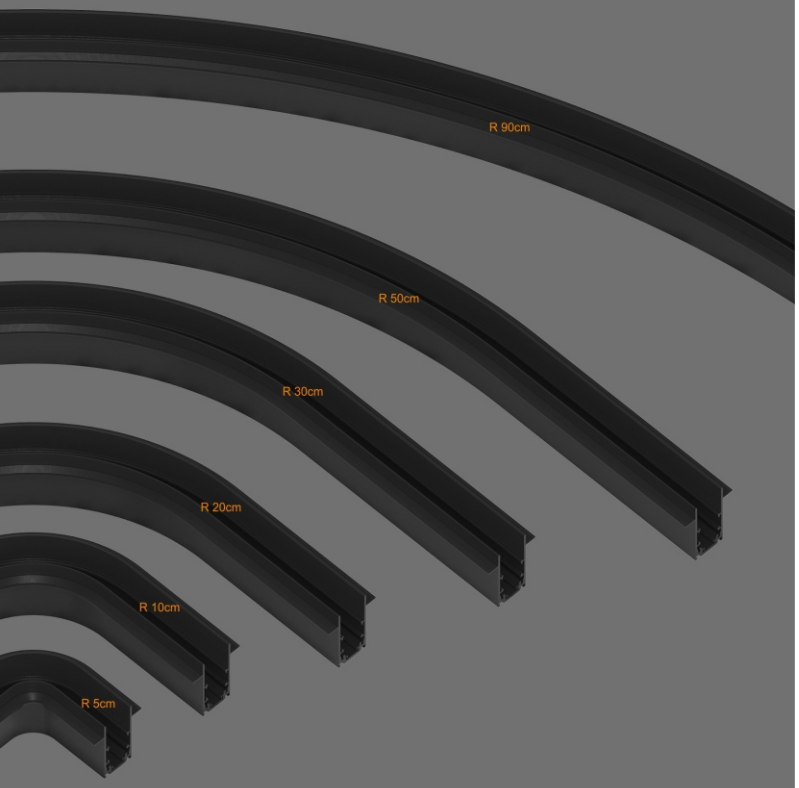




Multiple Combinations




Right angle

combination shape: square, rectangle
D: Angle length 5-10cm
L: Track length can be customized
W: Track length can be customized




Round angle

combination shape: rounded square, rounded rectangle.
R: The radius of the outside diameter R size: 5cm, 10cm, 20cm, 30cm, 50cm, 9cm.
L: Track length can be customized
W: Track length can be customized

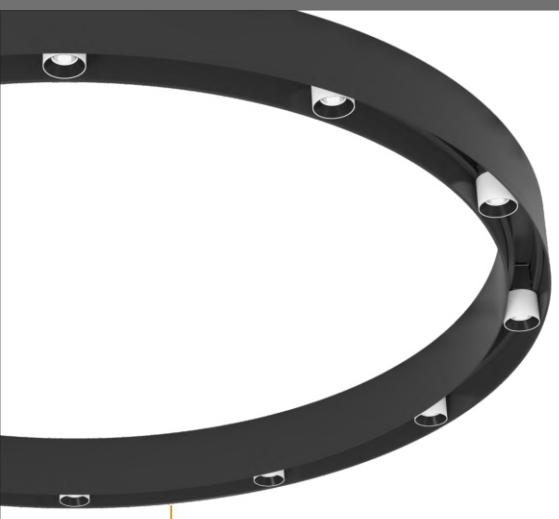


Round magnetic track are available in different sizes
free combination, Variety of shapes
different installation way according to the installation environment and personal needs





Round track combination

Sizes of diameter D: 60cm, 90cm, 120cm,
200cm, 250cm, 300cm, 350cm.




Runway type track combination

Sizes of diameter D: 60cm, 90cm, 120cm,
200cm, 250cm, 300cm, 350cm.






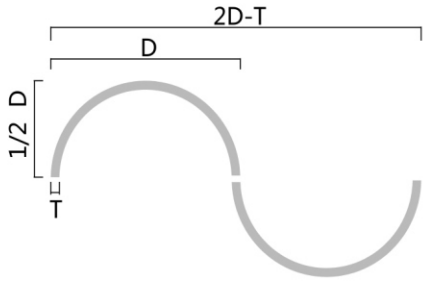

Semicircular track combination

Sizes of diameter D:

60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.

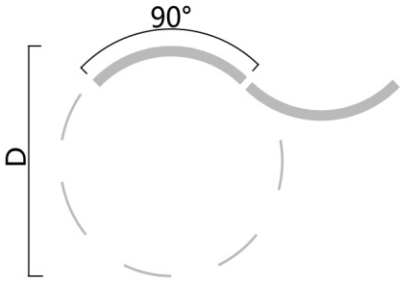

90 degree arc track combination

Sizes of diameter D:

60cm, 90cm, 120cm, 200cm, 250cm, 300cm, 350cm.

Shape Instance

can be more shapes



Speciality Value Lighting & Design Pvt. Ltd
Raj Industrial Park, Bliss Nirman Industrial Estate A-Wing Gala No 201
Gorai Pada Vasai East -401208